


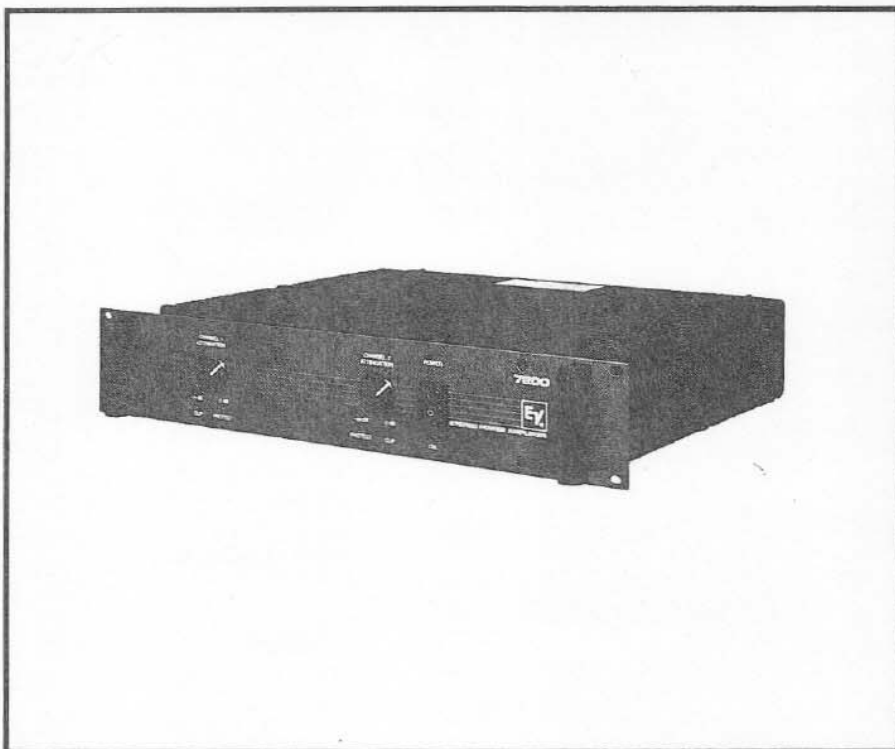

Electro-Voice®

a MARK IV company

7200

**Two-Channel
Power Amplifier**

SPECIFICATIONS

Conditions:

1. 0 dBu=0.775 V rms.
2. Dual-mode ratings are for each channel.
3. Both channels operating at rated output power unless noted.
4. 120-volt ac line input voltage maintained for all tests unless noted.

Continuous Rated Output Power (20 Hz - 20 kHz at less than 0.1% THD),

Dual Mode, 4Ω:

200 watts/ch

Bridge Mode, 8Ω:

400 watts

Dual Mode, 8Ω:

125 watts/ch

Bridge Mode, 16Ω:

250 watts

Continuous Rated Output Power to Subwoofer (20 Hz - 1 kHz at less than 0.1% THD),

Dual Mode, 4Ω:

215 watts/ch

Bridge Mode, 8Ω:

435 watts

Dual Mode, 8Ω:

130 watts/ch

Bridge Mode, 16Ω:

265 watts

Maximum Midband Output Power (reference 1 kHz, 1% THD,

@ 120 volts ac line voltage),

Dual Mode, 4Ω: >230 watts/ch

Bridge Mode, 8Ω: >465 watts

Dual Mode, 8Ω: >140 watts/ch

Bridge Mode, 16Ω: >285 watts
(reference 1 kHz, 1% THD,

@ 108 volts ac [10% sag]),

Dual Mode, 4Ω: >185 watts/ch

Bridge Mode, 8Ω: >370 watts

Dual Mode, 8Ω: >110 watts/ch

Bridge Mode, 16Ω: >220 watts

(reference 1 kHz, 1% THD,

@ 100 volts ac [17% sag]),

Dual Mode, 4Ω: >155 watts/ch

Bridge Mode, 8Ω: >310 watts

Dual Mode, 8Ω: >95 watts/ch

Bridge Mode, 16Ω: >190 watts

Headroom (Before clip):

(reference 1 kHz, 1% THD),

Single Channel Mode:

≥1 dB

Power Bandwidth

(reference 1 kHz, +0,-1 dB where 0 dB =

rated output power in any mode),

20 Hz - 20 kHz

Frequency Response

(reference 1 kHz, 1 watt output, +0, -3 dB):

10 Hz - 50 kHz

Voltage Gain (reference 1 kHz),

Dual Mode, 4Ω:

31 dB

Dual Mode, 8Ω:

32 dB

Bridge Mode, 8Ω:

37 dB

Bridge Mode, 16Ω:

38 dB

Input Sensitivity for Rated Output Power

(reference 1 kHz, ±0.5 dB),

Dual Mode, 4Ω:

0 dB (0.78 V rms)

Bridge Mode, 8Ω:

-0.25 dBu (0.78 V rms)

Dual Mode, 8Ω:

+0.5 dBu (0.89 V rms)

Bridge Mode, 16Ω:

+0.5 dB (0.89 V rms)

Maximum Input Level (reference 1 kHz):

+20 dBu (7.75 V rms)

Input Impedance (reference 1 kHz),

Balanced:

>30 kΩ

Unbalanced:

>15 kΩ

Phase Response

(at rated output power, any mode),

at 20 Hz:

< +30°

at 20 kHz:

> -30°

THD (Any mode, 30 kHz measurement bandwidth):

<0.1% (Typ. <0.01%)

IMD [SMPTE 4:1] (Any mode):

<0.1% (Typ. <0.01%)

Slew Rate (at rated output power),

Dual Mode, 4 or 8 Ω:

>20 V/μsec

Bridge Mode, 8 or 16 Ω:

>25 V/μsec

Damping Factor,

Dual Mode, 8Ω,

1 kHz: >100

Noise (below rated output power, A- weighting filter, any mode, 50/60 Hz ac line frequency):

>100 dB

Amplifier Protection:

Shortened output terminals

Over temperature

RF interference

Load Protection:

Startup/shutdown transients

DC faults

Subsonic signals

Cooling,

Heatsink:

Convention black heatsink

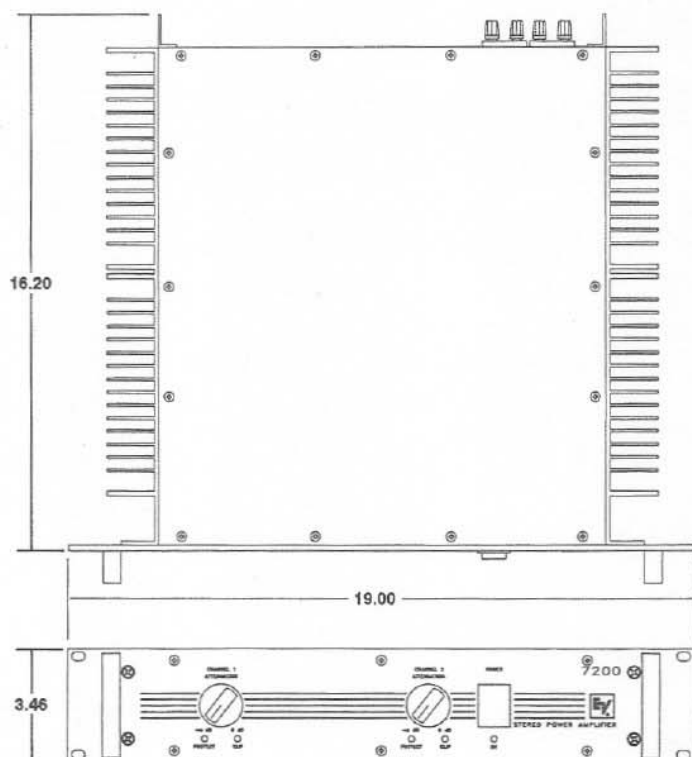


FIGURE 1 — Dimensions

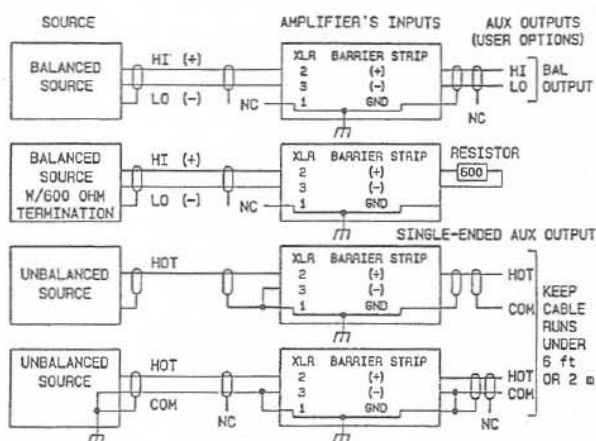


FIGURE 2 — Typical Input Connections

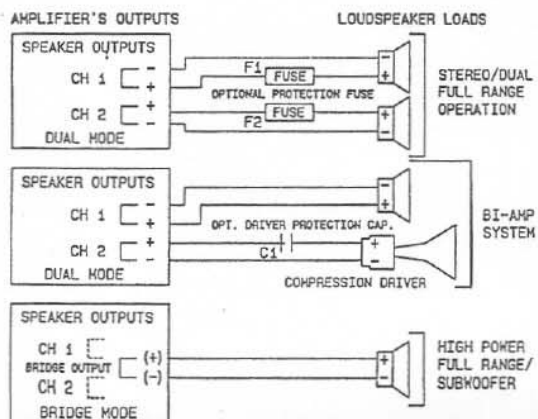


FIGURE 3 — Typical Output Connections

Output Topology:

True complementary symmetry

Output Type,

Dual Mode: Unbalanced, each channel

Bridge Mode: Balanced

Output Devices (8 devices),

$P_{d_{max}}$: 150 watts

I_c : 15 A dc

V_{ce0} : 200 V dc

$T_{j_{max}}$: 150°C

Controls and Switches,

Mode switch—rear

Input Level Controls (two)—front

Power switch—front

Front-Panel Indicators:

Power LED

Clip LED's (two)

Protect LED's (two)

Connections,

Input:

1/4" phone (two)

Female XLR-type connectors (two)

Octal accessory sockets (two)

Powered with ± 15 volts DC at 25 ma.

Output:

5-way binding posts

Power:

6 ft (1.83 m), 3-wire, 16 GA power cord with NEMA 5-15 plug/IEC

Fuse Type:

T 5 A/250 V Slo-Blo® or equivalent (for 120 V ac use)

Power Requirements:

120 V ac, 50/60 Hz, 400 watts

(configurable to 220/240 V ac)

100 V ac, 50/60 Hz model available

Power Consumption/Heat Produced (both channels operating dual mode with 1 kHz sinewave input signal at stated output power into 4 Ω loads),

Idle:

70 watts/0.238 kBTU/hr

1/8th Maximum Midband Power:

400 watts/1.364 kBTU/hr

1/3rd Maximum Midband Power:

600 watts/2.047 kBTU/hr

Rated Output Power:

900 watts/3.070 kBTU/hr

Maximum Midband Power:

970 watts/3.309 kBTU/hr

Operating Temperature Range:

Up to 50°C (122°F) ambient

Dimensions,

Height: 8.89 cm (3.5 in.)

Width: 48.26 cm (19 in.)

Depth: 40.64 cm (16 in.)

Color:

Gray and black

Enclosure:

Rack mount chassis

16-GA steel

3/16-inch 5052 aluminum alloy front panel

Shipping Weight:

19.5 kg (43 lb)

Net Weight:

16.8 kg (37 lb)

Supplied Items:

One Operating Instructions and Service Manual

One T 2.5A/250 V fuse (for 220/240 V ac use)

Four "U" jumper plugs for octal sockets (two per socket, installed)

AWG (GA)	DCR/ft (W/ft)	Power Loss/ft (watts/ft)	Cable Cross-Sectional area (mm ²)	DCR/meter (W/m)	Power Loss/meter (watts/m)
6	0.00081	0.0126	13.30	0.00264	0.0412
8	0.00121	0.0189	8.36	0.00421	0.0657
10	0.00204	0.0318	5.26	0.00669	0.1044
12	0.00324	0.0506	3.31	0.01063	0.1658
14	0.00515	0.0804	2.08	0.01691	0.2636
16	0.00819	0.1278	1.31	0.02685	0.4181
18	0.01302	0.2031	0.82	0.04289	0.6665
20	0.02070	0.3226	0.52	0.06764	1.0480
22	0.03292	0.5122	0.33	0.10658	1.6434

TABLE 1 — 7200 Power Losses in 2-wire Speaker Cable

Optional Accessories:

The octal sockets permit a variety of plug-in accessories to be used with the amplifier.

Modules Include:

- APX** 24 dB-per-octave Linkwitz-Riley crossover with 24 user-selectable frequencies on ISO centers between 50 Hz and 10,000 Hz.
- APX 2** Single octal socket with 24 dB-per-octave Linkwitz-Riley crossover with a high-pass output on a barrier strip. 24 user-selectable frequencies on ISO centers between 50 Hz and 10,000 Hz.
- APX 200** Equalizer module that extends the bass response of S-200 and FR-200 one octave.

INSTALLATION

Unpacking

Upon receipt of the unit, inspect the shipping carton for possible damage during transit. If damage is found, notify the transportation company immediately. Should damage occur during shipping, it is the responsibility of the consignee to initiate a claim with the carrier.

*** CAUTION ***

No user serviceable parts inside. Hazardous voltage and currents may be encountered within the chassis. The service information contained within this document is for use only by Electro-Voice, Inc., authorized warranty stations and qualified service personnel. To avoid electric shock, do not perform any servicing unless you are qualified to do so.

DESCRIPTION

The Electro-Voice 7200 stereo power amplifier utilizes proven design concepts to provide an ultra-reliable amplifier with virtually unmatched performance characteristics. It achieves this success without increased complexity or cost, making it a real value.

Each channel delivers over 125 watts of continuous average power into 8 ohms or over 200 watts into 4 ohms over the full audio frequency range. In the bridge mode, the amplifier can deliver more than 400 watts into an 8-ohm load at less than 0.10% THD.

Eight output devices are utilized for a total device power dissipation of 1,200 watts.

Because the large heatsink area allows more than adequate dissipation, the amplifier is convection cooled and performs in total silence.

Each channel is independently protected against excessive output voltage, excessive phase shift, radio-frequency interference, shorted loads and overtemperature.

The load is protected against startup and shutdown transients, dc faults, low ac voltage and infrasonic signals.

A unique current-limiting circuit was designed specifically for the amplifier. It features a variable current limit which is a function of the output signal voltage. As a result, the amplifier can deliver the rated currents into rated loads but substantially limits the current into low impedance or shorted loads (shorted output terminals). Once the short is removed, however, the amplifier will resume normal operation.

The amplifier has "protect" LED's for each channel which illuminate if the amplifier goes into thermal protection or if an internal circuit fault develops. The amplifier has octal accessory sockets which will accommodate a variety of crossover and equalizer modules simplifying system hookup and decreasing cost. These electronic modules are powered from a bipolar 15-volt supply in the amplifier.

The amplifier has a 31-position detented gain control and separate "clip" and "protect" LED's for each channel.

The amplifier will operate at 120 or 240 volts, 50/60 Hz. A separate model is available for 100 volts, 50/60-Hz operation.

ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The power amplifier shall be a dual-channel model of solid-state design employing true complementary-symmetry output circuitry and capable of operating from a 100/120/200/220/240-V, 50/60 Hz ac line. The amplifier shall contain sensing circuitry to provide protection for the output transistors against overtemperature, excessive output voltage, radio-frequency interference, shorted loads and excessive output phase shift. The load shall similarly be protected against infrasonic signals, startup/shutdown transients, low ac line voltage, and dc.

Rear-mounted panel controls shall include a two-position mode switch for selecting between the dual monophonic mode or the bridged monophonic mode. Input connections for each channel shall include an octal socket for use with optional electronic accessory modules, a 3-pin female XLR-type connector and 1/4-inch phone jack. Output connectors shall be 5-way binding posts.

Front panel indicators shall include an illuminated power on/off indicator, individually illuminated protection-circuit-activation indicators (Protect) and clipping indicators (Clip). Front panel controls shall include a 31-detent gain control for each channel and an on/off switch.

The power amplifier shall meet the following performance criteria: Maximum input voltage: 7.75 V rms. Input voltage for rated output power into 4 ohms: 0.775 V rms. Rated output power per channel: greater than 200 watts into 4 ohms from 20 Hz to 20 kHz at less than 0.10% THD; greater than 125 watts per channel into 8 ohms from 20 Hz to 20 kHz at less than 0.05% THD; greater than 400 watts into an 8-ohm bridged load from 20 Hz to 20 kHz at less than 0.10% THD with channel #1 driven. Voltage amplification in dual mode: 31 dB (bridged mode). Hum and noise: greater than 100 dB (A weighted) below rated output power. Frequency response: 10 Hz to 50 kHz, +0/-3 dB at any output power up to rated output power. Damping factor: greater than 100 at any frequency up to 1 kHz in dual mode with 8-ohm load.

Intermodulation distortion (SMPTE): less than 0.1% in any mode into 8 ohms. Crosstalk: less than 70 dB below rated output power. Operating temperature: up to 50 degrees C (122 degrees F) ambient. Dimensions: 3.5"H x 19"W x 16"D (8.89 cm H x 48.26 cm W x 40.64 cm D). Net weight: 37 lbs (16.8 kg). Color: gray front panel with black top, bottom, sides and rear with white nomenclature.

The power amplifier shall be the Electro-Voice 7200.

WARRANTY (Limited)

Electro-Voice products are guaranteed against malfunction due to defects in materials or workmanship for a specified period, as noted in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual, beginning with the date of original purchase. If such malfunction occurs during the specified period, the product will be repaired or replaced (at our option) without charge. The product will be returned to the customer prepaid. Exclusions and Limitations: The Limited Warranty does not apply to: (a) exterior finish or appearance; (b) certain specific items described in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual; (c) malfunction resulting from use or operation of the product other than as specified in the product data sheet or owner's manual; (d) malfunction resulting from misuse or abuse of the product; or (e) malfunction occurring at any time after repairs have been made to the product by anyone other than

WARRANTY (Limited)

(continued)

Electro-Voice or any of its authorized service representatives. **Obtaining Warranty**

Service: To obtain warranty service, a customer must deliver the product, prepaid, to Electro-Voice or any of its authorized service representatives together with proof of purchase of the product in the form of a bill of sale or receipted invoice. A list of authorized service representatives is available from Electro-Voice at 600 Cecil Street, Buchanan, MI 49107 (616/695-6831) and/or Electro-Voice West, at 8234 Doe Avenue, Visalia, CA 93291 (209/651-7777). **Incidental and Consequential Damages Excluded:** Product

repair or replacement and return to the customer are only remedies provided to the customer. Electro-Voice shall not be liable for any incidental or consequential damages including, without limitation, injury to persons or property or loss of use. Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you.

Other Rights: This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Electro-Voice Electronics are guaranteed against malfunction due to defects in materials or workmanship for a period of three (3) years from the date of original purchase. Additional details are included in the Uniform Limited Warranty statement.

Service and repair address for this product:
Electro-Voice, Inc., 600 Cecil Street,
Buchanan, MI 49107.

Specifications subject to change without notice.



ELECTRO-VOICE, INC., 600 Cecil Street, Buchanan, Michigan 49107

MANUFACTURING PLANTS AT ■ BUCHANAN, MI ■ NEWPORT, TN ■ SEVIERVILLE, TN ■ OKLAHOMA CITY, OK ■ GANANOQUE, ONT.
©Electro-Voice Inc. 1992 ■ Litho in U.S.A.

a MARK IV company

Form 3665