

Electro-Voice
says nice things
about you.

Quality
always does!

When you buy a product, you want to know that it is the best there is and that it's from a company you can depend on. The Electro-Voice CD series type 35 and type 35i speakers are both.

Electro-Voice has been making products on the leading edge of acoustic technology for over half a century. You can depend on your speakers because you can depend on Electro-Voice.

Every technological advancement – from phase-coherent crossovers to time aligned drivers; from constant-directivity directors™ to optimally designed enclosures has been designed into your speakers to ensure you of “no comparison” performance.

In addition to sonic excellence that no one can criticize, your speakers are also cosmetically elegant. Both the CD series type 35 and 35i set a standard of technological and cosmetic excellence that place them above virtually every other speaker in the marketplace.


The CD series type 35i is essentially identical to the type 35 except for a few items that may be important to the discriminating listener and buyer.

For those who admittedly might want to “show off” their system, the type 35i has a removable grille enabling quick access to the polypropylene woofer and director tweeter and midrange assemblies.


And for those who plan on pushing their system to the limit – to the ultimate

1812 Overture cannon shot – the Automatic Power Sentinel driver protection device is a must. Both the Power Sentinel and the built-in speaker equalization controls are concealed behind the 35i's roll down antique brass control cover.

The CD series type 35i simply offers that “little bit extra” to the buyer who needs more than the type 35 can offer.

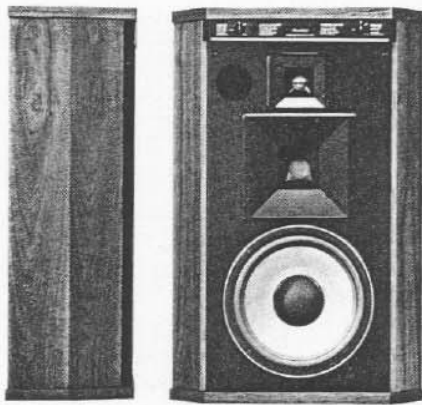

CD series type 35i

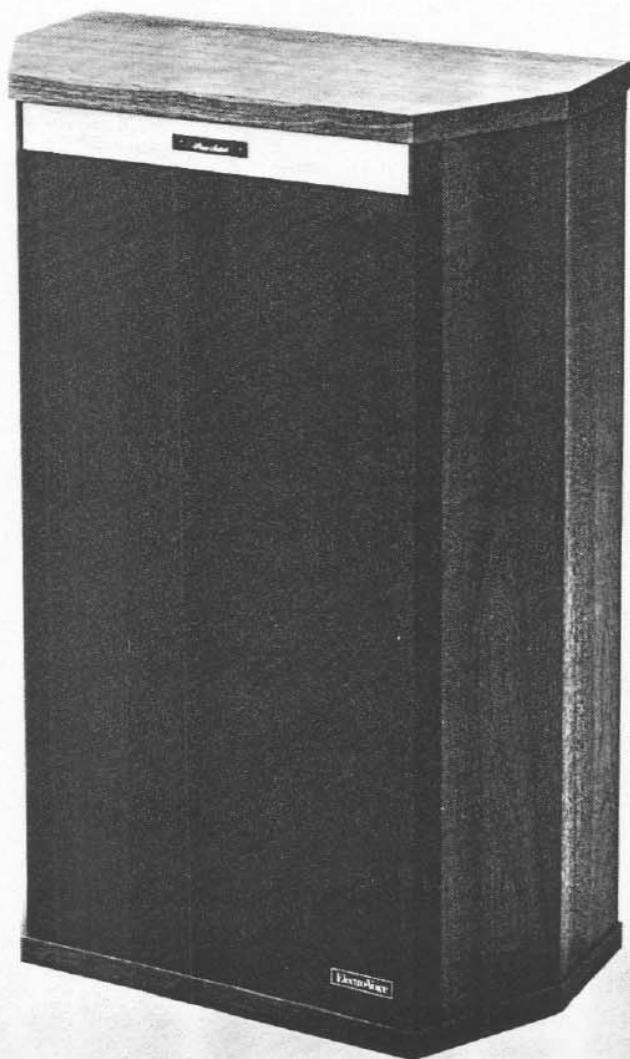

CD series type 35 and type 35i specifications*

Axial Frequency Response: Essentially flat from 40-30,000 Hz

Dispersion Angle Acoustic Coverage Zone: Held to 100° by "direktor" geometry
500-12,000 Hz

Sound Pressure Level: 92 dB 1 watt, 1 meter, anechoic

Suggested Amplifier Power Ratings: Minimum: 3 watts
Typical: 10-50 watts
Maximum: 400 watts

Time Coherency: Within .15 milliseconds

Crossover Frequencies: 1500 and 8000 Hz

Impedance: Nominal: 6 ohms
Minimum: 5 ohms


Transducer Complement: 30.0 cm (12 in.) dynamic woofer
3.8 cm (1.5 in.) midrange with direktor
2.5 cm (1 in.) tweeter with direktor

Dimensions: 82.0 cm (32.3 in.) h
54.1 cm (21.3 in.) w
26.7 cm (10.5 in.) d

Net Weight: Type 35: 29 kg (64 lbs.)
Type 35i: 30 kg (66 lbs.)

*Specifications subject to change without notice.

CD series type 35

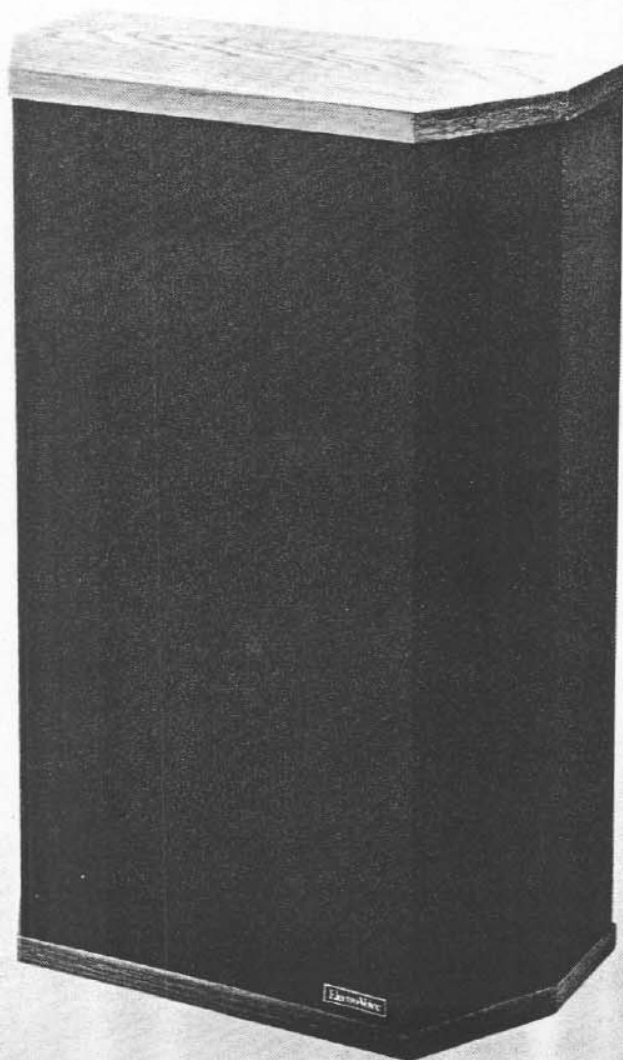

EV **Electro-Voice**
a gulton company
600 Cecit Street, Buchanan, Michigan 49107
© Gulton Industries, Inc. 1983