


**University
Sound® Inc.**

Model 1822 AM-FM Tuner

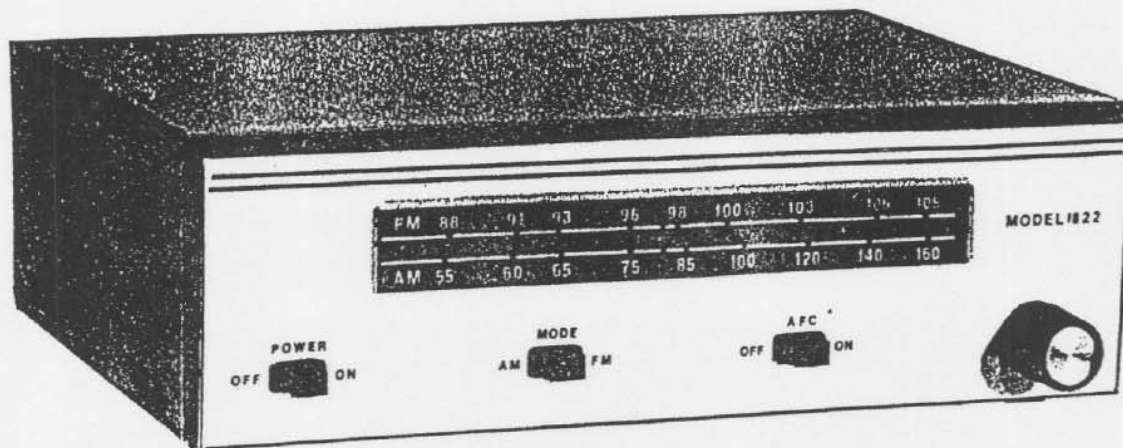

Model 1822 AM-FM Tuner

This series has all solid state circuitry, a sensitive FM tuning section, and a special circuit design that eliminates drift. Designed and hand-crafted for continuous 24-hour operation. FM design includes a tuned RF stage for greater selectivity, excellent image rejection, and effective limiting.

Also included: illuminated full-vision dial, AFC defeat switch, two audio output jacks, and FM antenna input for 75 ohms unbalanced or 300 ohms balanced. 1822 AM-FM tuner has built-in loopstick antenna and screw terminals for an external AM antenna lead. Attractively packaged in tan metal cabinet. Rack-mountable with Raymer RPK-4 rack panel kit. UL Listed.


Specifications: Frequency Range: AM: 540 to 1700Hz; FM: 87.5 to 108.5MHz. Sensitivity: AM: $10\mu\text{V}$; FM: $2\mu\text{V}$. Frequency Response: AM: 50Hz to 5KHz; FM: 50Hz to 15KHz. AM Antenna: Built-in Hi-Q ferrite loopstick. Terminals for external AM antenna. Hum/Noise: -55db. AC Power: 120 volts 60Hz, 5 watts. Size: $9\frac{1}{2}'' \times 7'' \times 3\frac{1}{8}''$. Shipping Weight: 6 lbs.

Model 1820 FM Tuner

Identical to Model 1822 AM-FM except that it is an FM Tuner only. UL Listed.

Specifications: Frequency Range: 87.5 to 108.5MHz. Sensitivity: $2\mu\text{V}$. Frequency Response: 50Hz to 15KHz. Hum/Noise Level: -55db. AC Power: 120 volts 60Hz, 5 watts. Size: $9\frac{1}{2}'' \times 7'' \times 3\frac{1}{8}''$. Shipping Weight: 5 lbs.

MANUFACTURED IN THE USA BY



**University
Sound® Inc.**

13278 Ralston Avenue
Sylmar, CA 91342-7607
Phone (818) 362-9516
FAX (818) 367-5292

Printed in the U.S.A.



13278 Reikson Avenue
Sylmar, CA 91412-7617
Phone (818) 362-9516
FAX (818) 367-5292

Printed in the U.S.A.

