




Electro-Voice®

a MARK IV company


600 Cecil Street
Buchanan, Michigan 49107
Phone: 616-695-6831
FAX: 616-695-3104

SERVICE DATA


Model M-12G

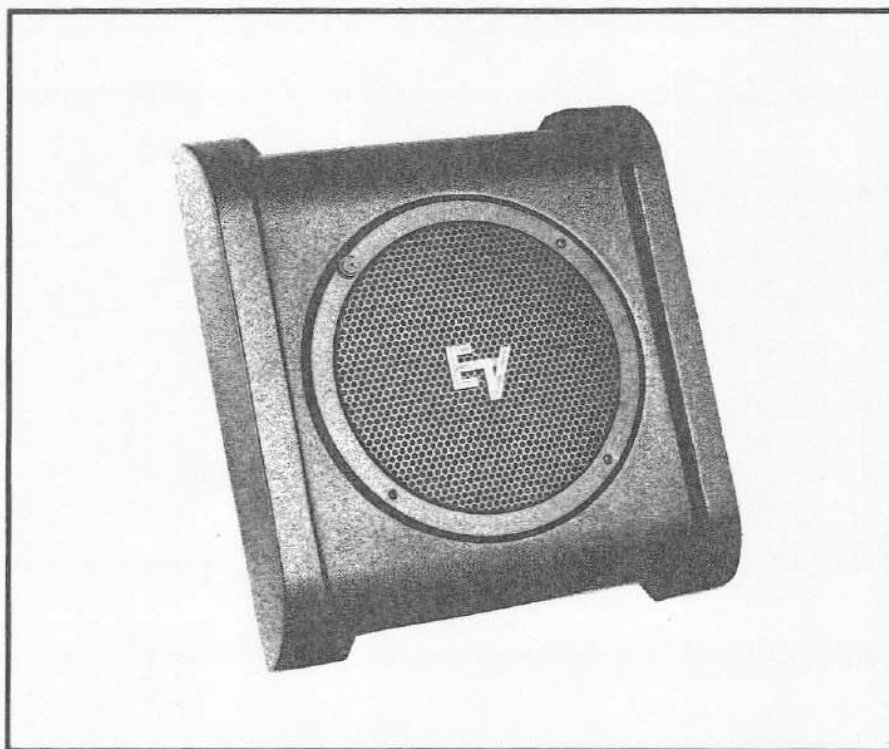


Specifications:	M-12G
Model & Spec:	1002-1728
Frequency Response:	80-6000 Hz
Usable Low-Frequency Limit (10-dB-down point):	80 Hz
Long-term Average Power Handling Capacity per EIA Standard RS-426A:	200 watts (800 watts short-term)
SPL at 1-W/1-m Input, Anechoic Environment, Band-Limited Pink-Noise Signal, 300 to 2,000 Hz:	100 dB
Impedance, Nominal:	8 ohms
Minimum:	6.4 ohms
Dimensions (hwd):	41.4 cm x 45.7 cm x 39.1 cm (16.3 in. x 18.0 in. x 15.4 in.)
Net Weight:	14.3 kg (31.5 lb)
Shipping Weight:	16.4 kg (36.0 lb)

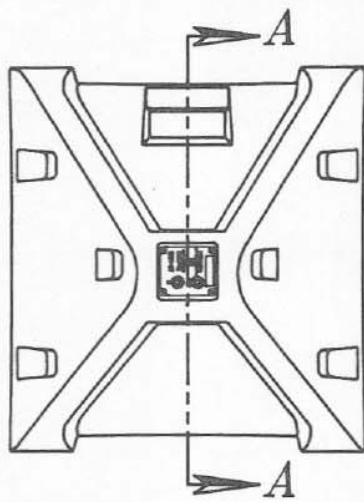


BACK VIEW: 1/2 SCALE
(ORIENTATION OF INPUT PANEL)

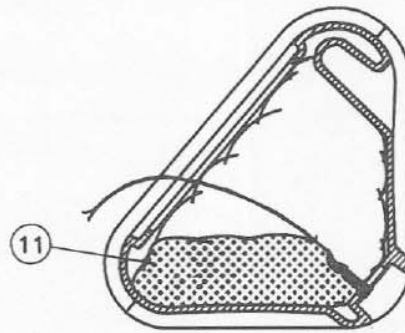

SECTION A-A: 1/2 SCALE
(ORIENTATION OF INSULATION)

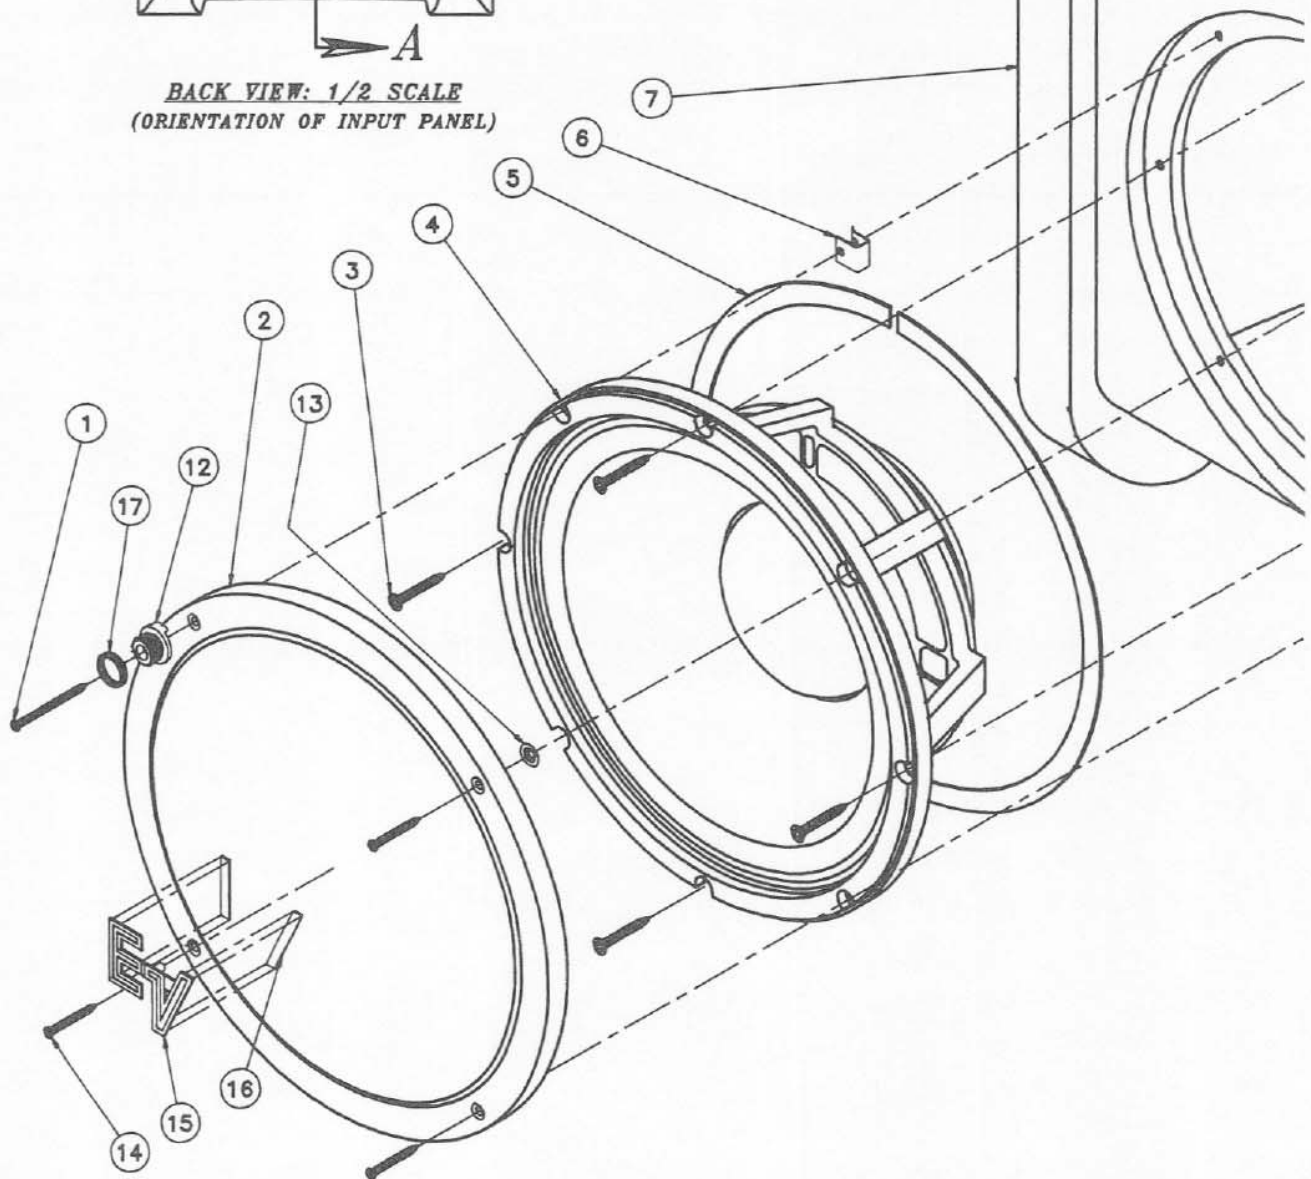

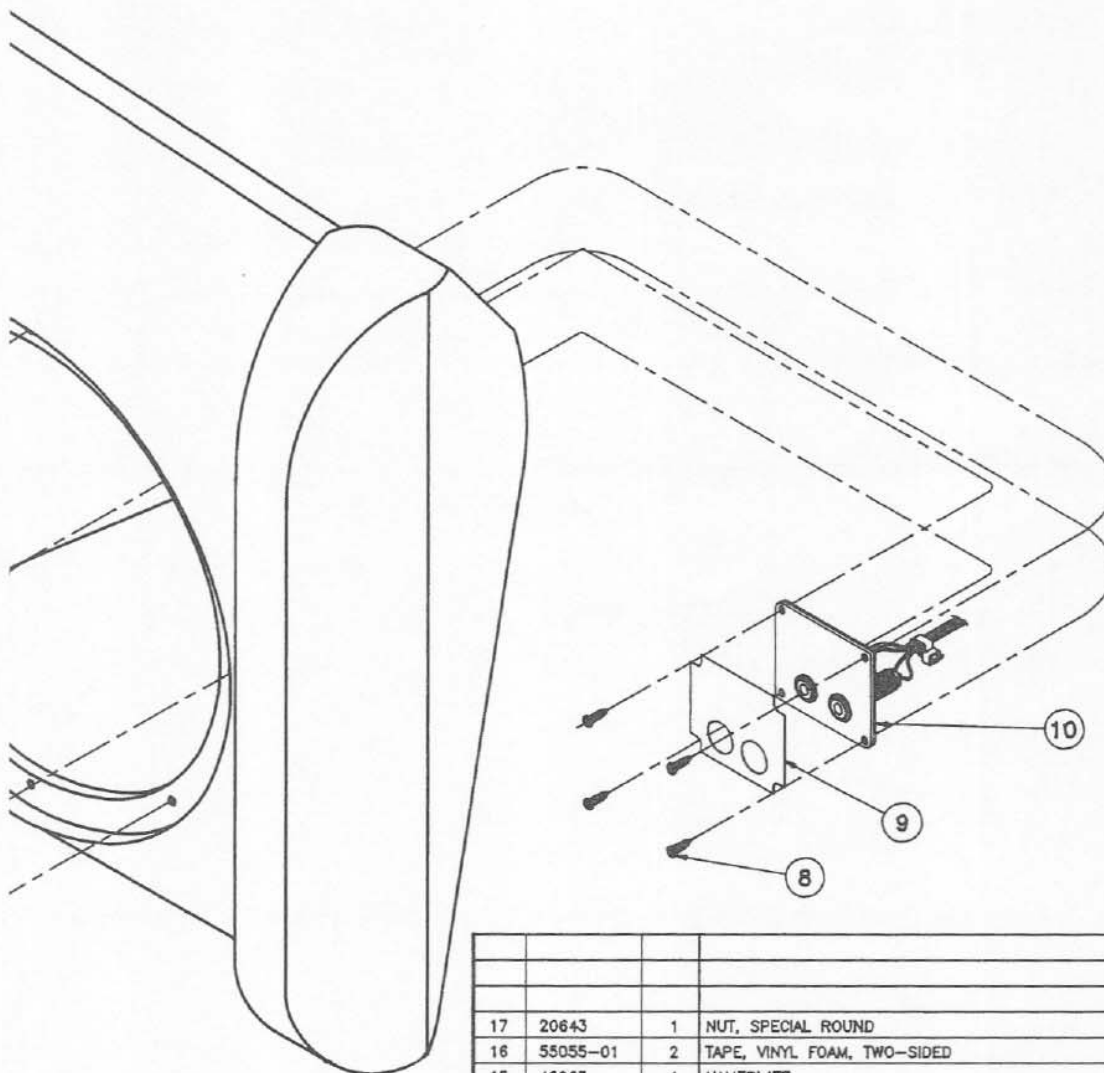

ITEM	PART NO.	QTY.	DESCRIPTION
17	20643	1	NUT, SPECIAL ROUND
16	55055-01	2	TAPE, VINYL FOAM, TWO-SIDED
15	48903	1	NAMEPLATE
14	63212	3	SCR, #8-18 x 1 1/2, OVL HD, X-RECESS, BLK
13	20526	1	PUSH NUT (CREST #P18853-10AH03)
12	71285	1	MIC CLIP ADAPTER
11	70986	1	FIBERGLASS, 3 1/2 x 1 1/2 x 18
10	82178	1	INPUT PANEL S/A
9	531779	1	LABEL, INPUT
8	63145	4	SCR, #6 x 1/2, PAN HD, X-RECESS, BLK
7	89524	1	ENCLOSURE
6	20227	8	CLIP, TINNEMAN
5	38711	1	TAPE, FOAM, TESIMOL
4	812-1969	1	LOUDSPEAKER, 12"
3	63087	4	SCR, #10 x 1 1/2, FLT HD, X-RECESS, BLK
2	72923	1	SPEAKER GRILLE
1	63258	1	SCR, #8-18 x 2", OVL HD, X-RECESS, BLK
ITEM	PART NO.	QTY.	DESCRIPTION
BILL OF MATERIALS FOR ONE COMPLETE UNIT			