




Electro-Voice®

a MARK IV company


600 Cecil Street
Buchanan, Michigan 49107
Phone: 616-695-6831
FAX: 616-695-3104


SERVICE DATA

Model S-181

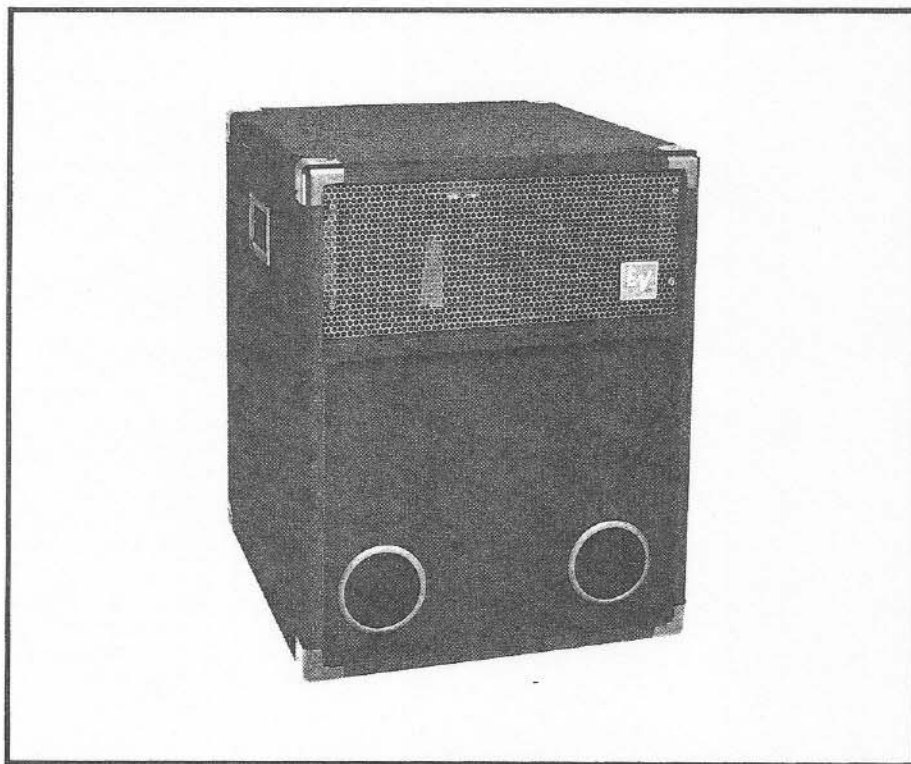

Specifications:	S-181
Model & Spec:	1043-1731
Frequency Response:	48-200 Hz
Usable Low-Frequency Limit (3-dB-down point):	48 Hz
(10-dB-down point):	36 Hz
Long-term Average Power Handling Capacity per EIA Standard RS-426A:	400 watts (1600 watts short-term)
SPL at 1-W/1-m Input, Anechoic Environment, Band-Limited Pink-Noise Signal, 300 to 2,000 Hz:	98 dB
Impedance, Nominal:	8 ohms
Minimum:	8.0 ohms
Dimensions (hwd):	70.1 cm x 53.8 cm x 58.2 cm (27.6 in. x 21.2 in. x 22.9 in.)
Net Weight:	30.9 kg (68.0 lb)
Shipping Weight:	35.5 kg (78.0 lb)

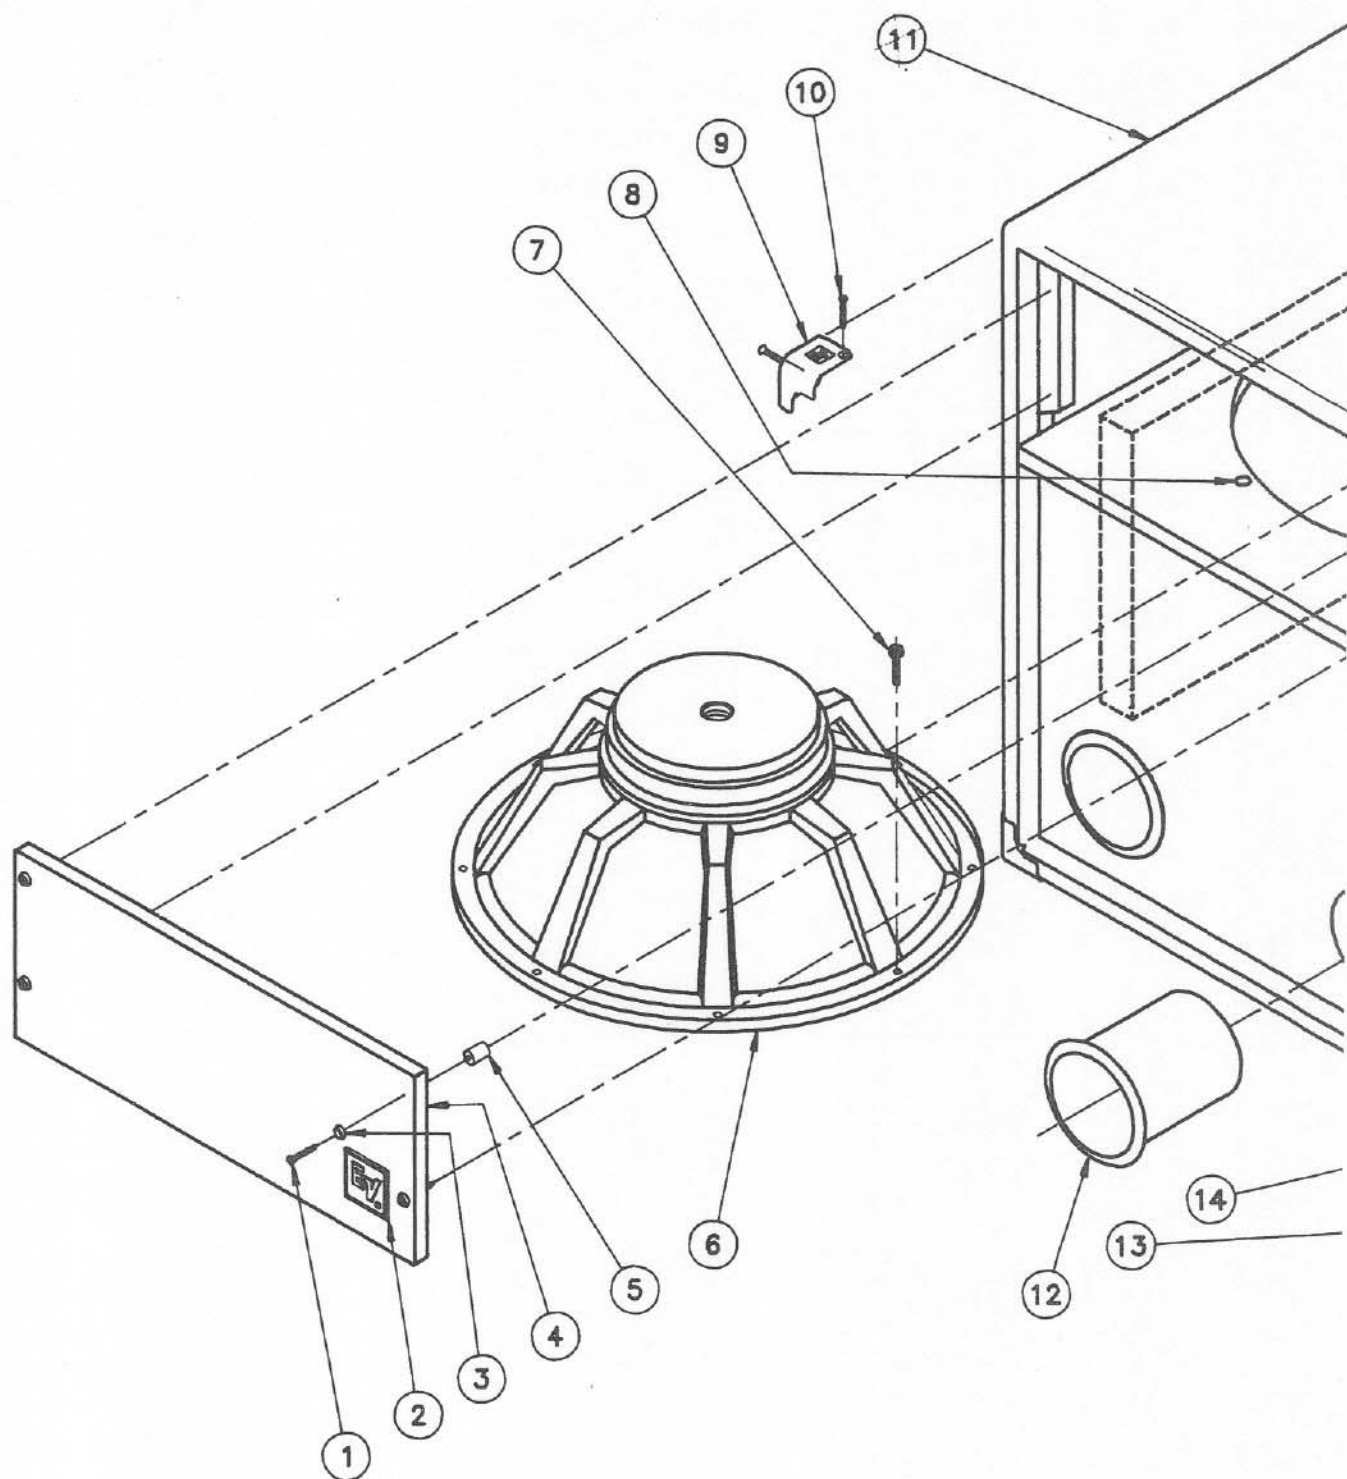

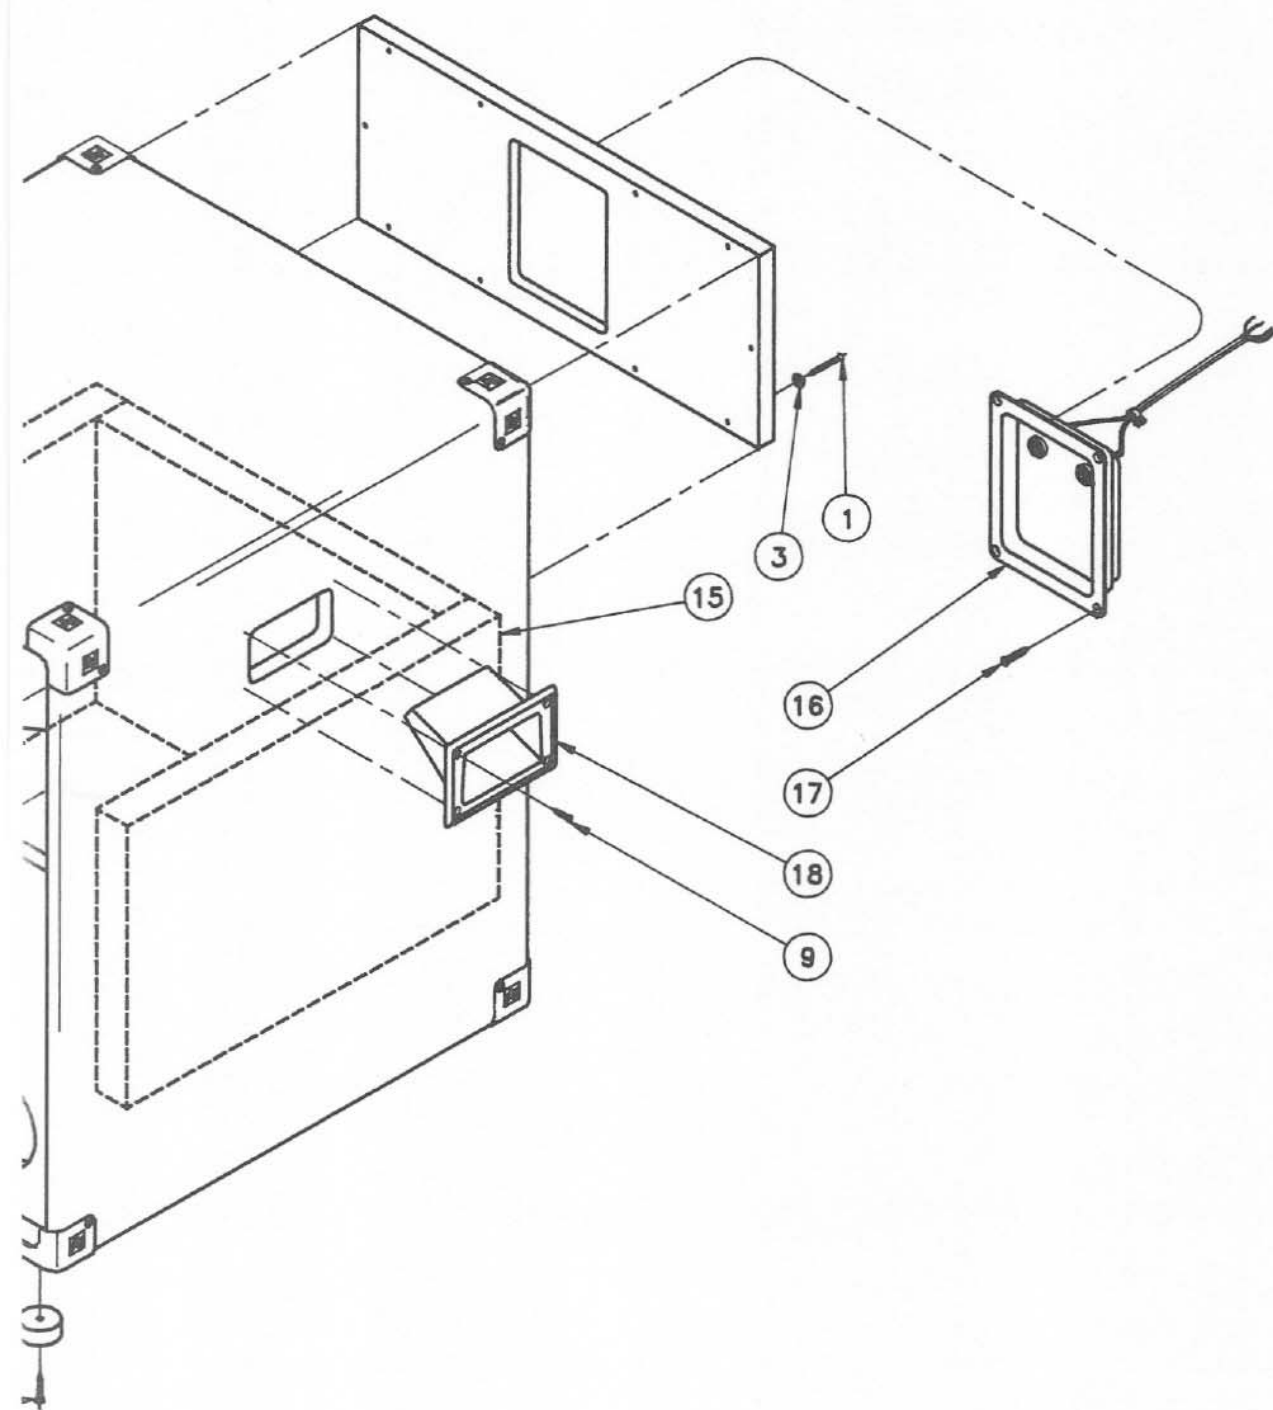

18	71274	2	HANDLE (PENN FABRICATION, #H1006)
17	63152	4	SCR, #10-12 X 3/4, OVL HD, X-RECESS, BLK
16	82551	1	INPUT S/A
15	70986	3	BATT, FIBERGLASS, 3 1/2 X 12 X 16
14	28261	4	FEET, RUBBER
13	63035	4	SCR, #10-16 X 1", PAN HD, X-RECESS, BLK
12	71273	2	VENT TUBE TRIM RING (MARS, TR-PP4R8X5)
10	63075	24	SCR, #8-15 X 3/4, OVL HD, X-RECESS, BLK
9	20349	8	CORNER GUARD
8	20350	8	T-NUT, 1/4-20, PROPELLER, STEEL
7	63216	8	SCR, 1/4-20 X 1 1/4, HEX WSHR HD, SLT'D
6	818-0882	1	LOUDSPEAKER, 18 INCH, WOOFER
5	20510	4	STAND-OFF SPACER
4	71264	1	GRILLE
3	38768	14	WASHER, #8, C'SUNK, FINISHING, NYLON
2	48971	1	NAMEPLATE, EV LOGO
1	62989	14	SCR, #8 X 1 1/2, WOOD, FLT HD, X-RECESS
ITEM	PART NO.	QTY.	DESCRIPTION
BILL OF MATERIALS FOR ONE COMPLETE UNIT			



ELECTRO-VOICE, INC., 600 Cecil Street, Buchanan, Michigan 49107

MANUFACTURING PLANTS AT ■ BUCHANAN, MI ■ NEWPORT, TN ■ SEVIERVILLE, TN ■ OKLAHOMA CITY, OK ■ GANANOQUE, ONT.
 ©Electro-Voice Inc. 1992 ■ Litho in U.S.A. Part Number 531865 — 292

a MARK IV company