


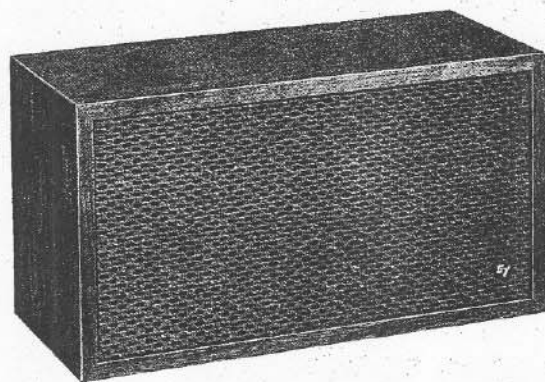

DESCRIPTION

The Electro-Voice E-V ELEVEN is a two-way loudspeaker system designed to economize on space and on budget. Only through the most recent engineering advances and newest production techniques, exclusive with Electro-Voice, can such a value be offered. Whether it is used in a main system or as an extension speaker, the E-V ELEVEN provides outstanding musical reproduction for its modest cost and size.

System styling and the rich, dark pattern of the grille cloth will blend well with traditional furnishings, will enhance the gaiety of the new mod or op decors, or mix well with Spanish, Oriental, or other decorating influences. The beauty of its walnut grain pattern is protected by an invisible sheet of pure vinyl which resists moisture and soiling.

Performance is as pleasing as the appearance. Resonance of the enclosure has been tuned to complement the characteristics of the specially designed six-inch, two-way speaker. Two coaxially mounted cones divide the audio spectrum while operating from a single voice coil to extend high-frequency response and improve dispersion. The built-in mechanical crossover ensures smooth, balanced sound.

SPECIFICATIONS

Nominal Impedance:	8 ohms
Power Handling Capacity:	25 watts peak
Dimensions:	8¼" h. x 15¼" w. x 6½" d.
Finish:	Walnut
Shipping Weight	12 pounds

PLACEMENT

The E-V ELEVEN may be placed on a table, shelf, or on the floor. Generally, however, the most realism will be obtained if its height from the floor is near the listener's ear level. The E-V ELEVEN performs equally well placed in a horizontal or vertical position, and the nameplate may be rotated to match either placement.

The above comments apply also to stereophonic placement. In addition, however, the two systems should be far enough apart to permit listeners to sit at the apex of a thirty- to forty-degree angle, as illustrated. A distance of six to eight feet between stereo speakers will, in most rooms, provide natural separation. Placing the loudspeakers too close together or listening at too great a distance will destroy the stereo effect, and the sound heard will be essentially monophonic. Extreme spacing between speakers or listening at too short a distance will produce exaggerated and unreal separation. In long rooms, the speakers should be placed along one of the short walls facing into the longer dimension. This placement improves bass reproduction and will provide good stereo listening over most of the room.

AMPLIFIER CONNECTIONS


The E-V ELEVEN has a nominal impedance of eight ohms. Connections should be made between the left terminal (T1) and the amplifier 8-ohm terminal; the right terminal (T2) should be connected to the amplifier "Common" terminal, sometimes referred to as "O" or "C". Connections should be made using No. 18 or larger wire; common zip-cord or lamp-cord is quite satisfactory. If the speaker leads are to be run behind a molding strip or under a carpet, TV twin lead should be used.

CUSTOMER SERVICE

Your E-V ELEVEN system has been packed to provide protection well in excess of shipping requirements of the Interstate Commerce Commission. If shipping damage has occurred, contact the carrier or the dealer from whom the unit was purchased, and request full inspection and further instructions.

WARRANTY

The Electro-Voice E-V ELEVEN is guaranteed against defects in original workmanship and materials. If it becomes damaged or develops faulty operation from unusual conditions of use, write to the Electro-Voice Service Department requesting return authorization and shipping instructions. Be sure to mention the make and model number of the other components used in your system, as well as the nature of the trouble.

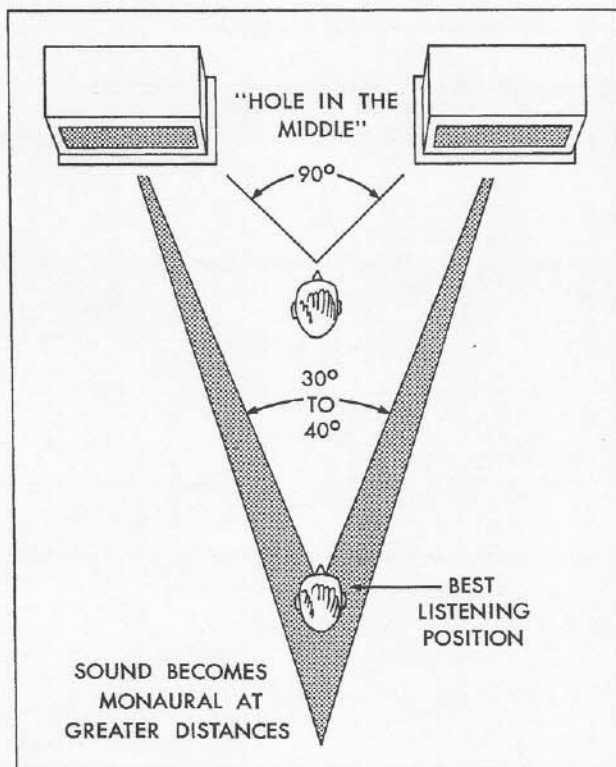

Placement for Stereo