





Electro-Voice®



TELEX/EVI Audio
600 Cecil Street
Buchanan, Michigan 49107
Phone: 616-695-6831
FAX: 616-695-4743

SERVICE DATA

SL12-2H
(1214-2913)

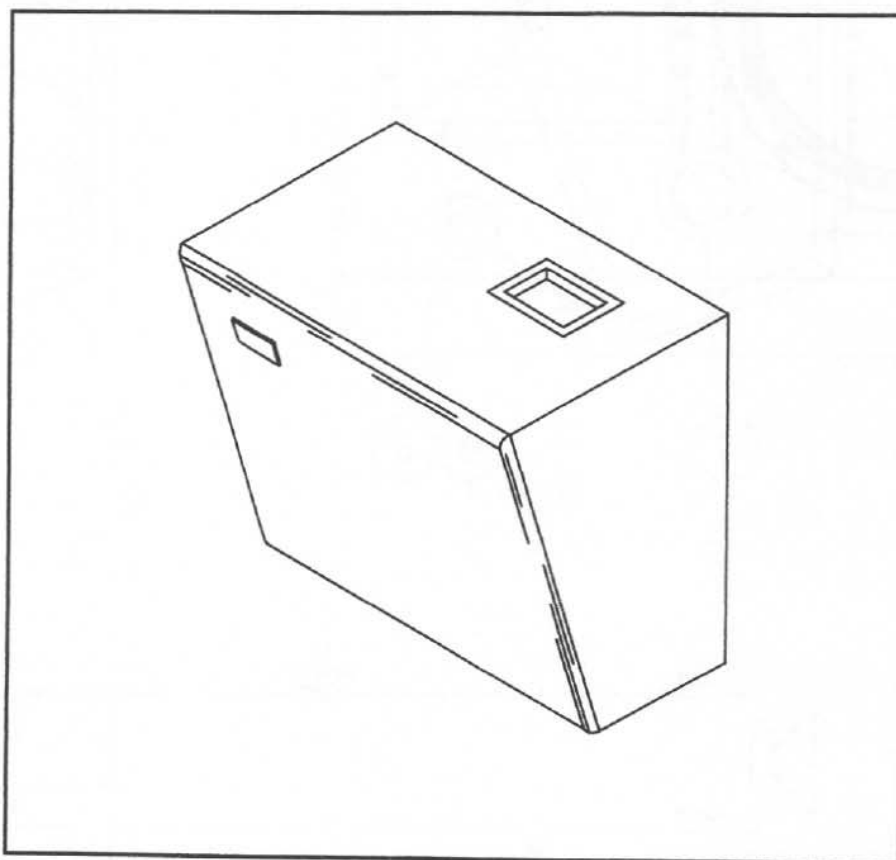

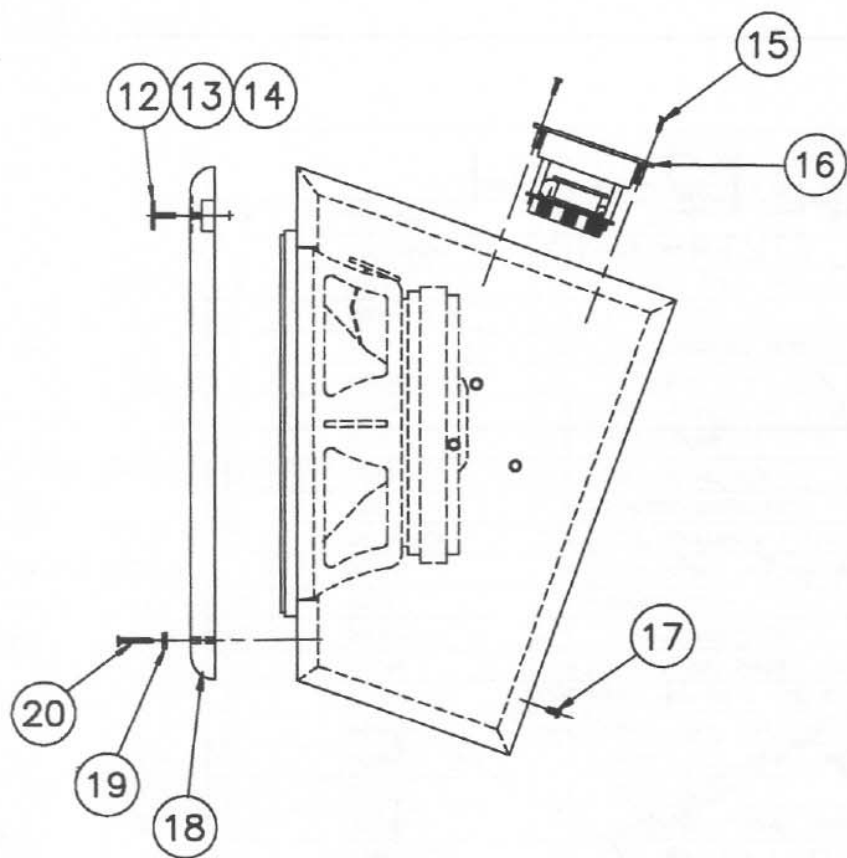

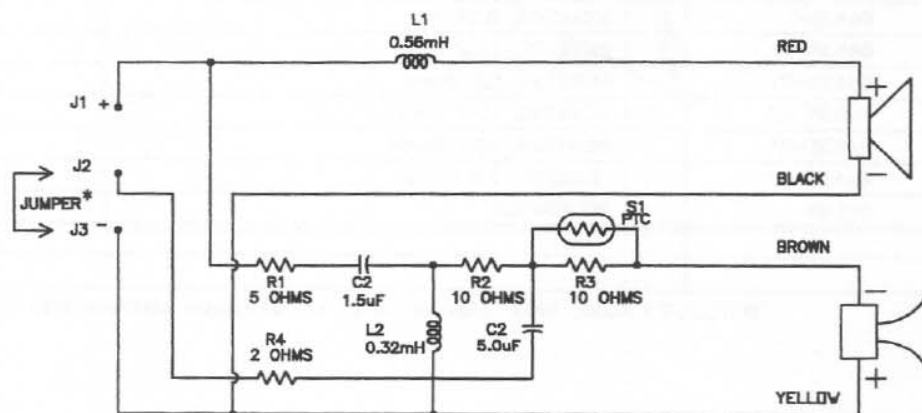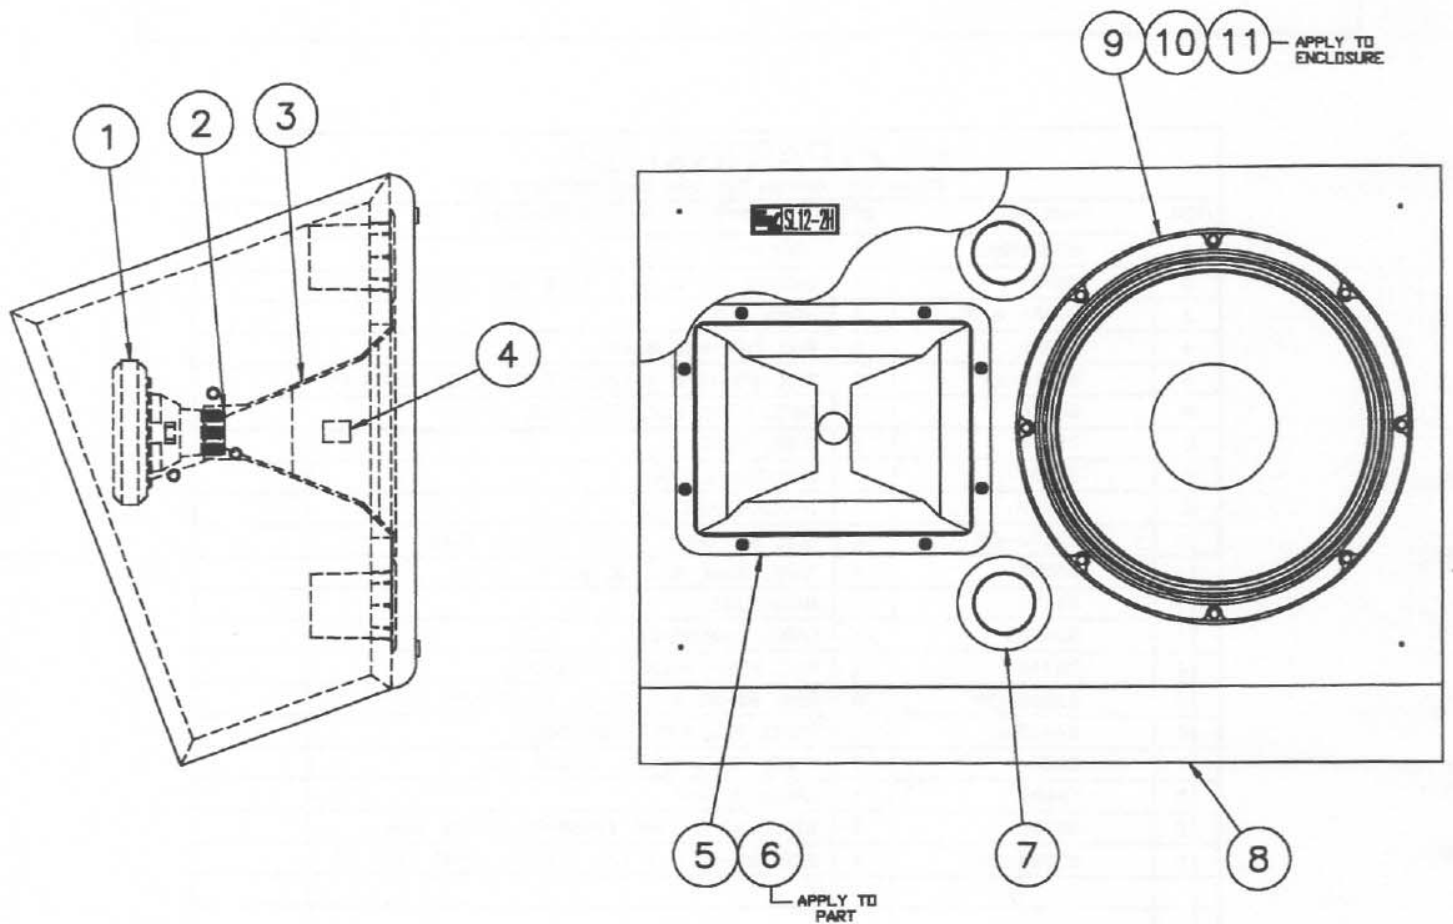

WIRING DIAGRAM

* NOTE: JUMPER MOVED TO J2, J3 INSTALLS THE HIGH PASS ISO ROLLOFF SECTION. UNIT SHIPPED WITH JUMPER OPEN.

PARTS LIST			
QUANTITIES SHOWN ARE FOR ONE COMPLETE UNIT			
ITEM	PART NO.	QTY.	DESCRIPTION
1	833-0990	1	DRIVER
2	38701	1	GASKET, 1.3 x .94 x 1/16 THK, VELUTEX
3	70584 A JC	1	HORN, C.D.
4	72320	2	PAD, DAMPING, BLACK
5	63290-CP	2	SCR, #8-10 x 1 1/8, FLT HD, XREC, GIMET PT
6	28306	1	TAPE, FOAM, BLK, 3E #4718, 39"LG.
7	71374	2	TUBE, PORT
8	73751	1	ENCLOSURE S/A,
9	73617	1	LOUDSPEAKER, 12"
10	63179-CP	4	SCR, #10-24 x 1 1/4, OVL HD, XREC
11	28306	1	TAPE, FOAM, BLK, 3E #4718, 37"LG.
12	49137	1	NAMEPLATE
13	534525	1	LABEL, NAMEPLATE
14	20745	1	NUT, PUSH, PALNUT PS125006
15	63285-CP	6	SCR, #5-20 x 1/2, OVL HD, PHLPS, HI-LO
16	84438	1	PANEL S/A, INPUT/CROSSOVER
17	20354	7	PLUG, HOLE, 5/160, NYLON, BLK
18	73498	1	GRILLE S/A
19	38768	4	WSHR, #8 C'SUNK, FINISHING, NYLON, BLK
20	62989-CP	4	SCR, #8-18 x 1 1/2, FLT HD, XREC, TYPE AB
C1	84438-C1	1	CAPACITOR, 1.5 uF
C2	84438-C2	1	CAPACITOR, 5.0 uF
L1	84438-L1	1	INDUCTOR, 0.56 mH
L2	84438-L2	1	INDUCTOR, 0.32 mH
R1	84438-R1	1	RESISTOR, 5.0 Ohms
R2	84438-R2	1	RESISTOR, 10.0 Ohms
R3	84438-R3	1	RESISTOR, 10.0 Ohms
R4	84438-R4	1	RESISTOR, 2.0 Ohms
S1	56208	1	POLY SWITCH